



LED TUBE

SERIES



GLASS TYPE CLASSIC

A+



T5-06

9W
6500K
900 lm
320°
G13
PF>0.5
IP>20
AC 170-265V
50/60 Hz
φ28*600mm

T8-012

18W
6500K
1800 lm
320°
G13
PF>0.5
IP>20
AC 170-265V
50/60 Hz
φ28*1200mm

COLOR TEMPERATURE



3000K 4000K 6500K

2
A.B.O.S.
GARANTIA

NO
UV/IR



NOT
DIMMABLE



NO MERCURY
0.03sed



25.000h



50.000
ON OFF



CE



RoHS
2009/95/EC



Hg
0,0mg



CO₂

LED TUBE

SERIES



PLASTIC TYPE CLASSIC

A⁺



T5-06

9W
6500K
900 lm
320°
G13
PF>0.5
IP>20
AC 170-265V
50/60 Hz
φ28*600mm

T8-012

18W
6500K
1800 lm
320°
G13
PF>0.5
IP>20
AC 170-265V
50/60 Hz
φ28*1200mm

COLOR TEMPERATURE



3000K 4000K 6500K

2
A.R.O.S.
GARANTIA

NO
UV/IR

NOT
DIMMABLE

HEAVY
METALLURIE
0.03sed

25.000h

50.000
ON-OFF

CE

RoHS
2002/95/EC



Hg
0,0mg



LED MINI PANEL

SERIES



SLIM PANEL TYPE


A⁺



Specification

7W	9W	12W	18W
6500K	6500K	6500K	6500K
25000h	25000h	25000h	25000h
120°	120°	120°	120°
CRI>80	CRI>80	CRI>80	CRI>80
PF>0.5	PF>0.5	PF>0.5	PF>0.5
IP>20	IP>20	IP>20	IP>20
AC 85-265V	AC 85-265V	AC 85-265V	AC 85-265V
50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
φ110/80mm	φ130/105mm	φ165/125mm	φ200/165mm

COLOR TEMPERATURE



LED PANEL

SERIES



SLIM PANEL
TYPE

A⁺

18
W

25000
hrs

120°

RECESSED

PANEL

Model	Power	Voltage	Life time	CRI	Beam Angel	The Size
SML30120-40W	40W	AC 85-265V	25000h	>80	120°	295*1195*10mm
SML30120-48W	48W	AC 85-265V	25000h	>80	120°	295*1195*10mm
SML30120-60W	72W	AC 85-265V	25000h	>80	120°	295*1195*10mm

2
A.R.O.S
GARANTIA

NO
UV/IR



NOT
DIMMABLE



INSTANT FULL LIGHT
0.03sec



25.000h



50.000
ON OFF

CE




Hg
0,0mg



LED PANEL

SERIES

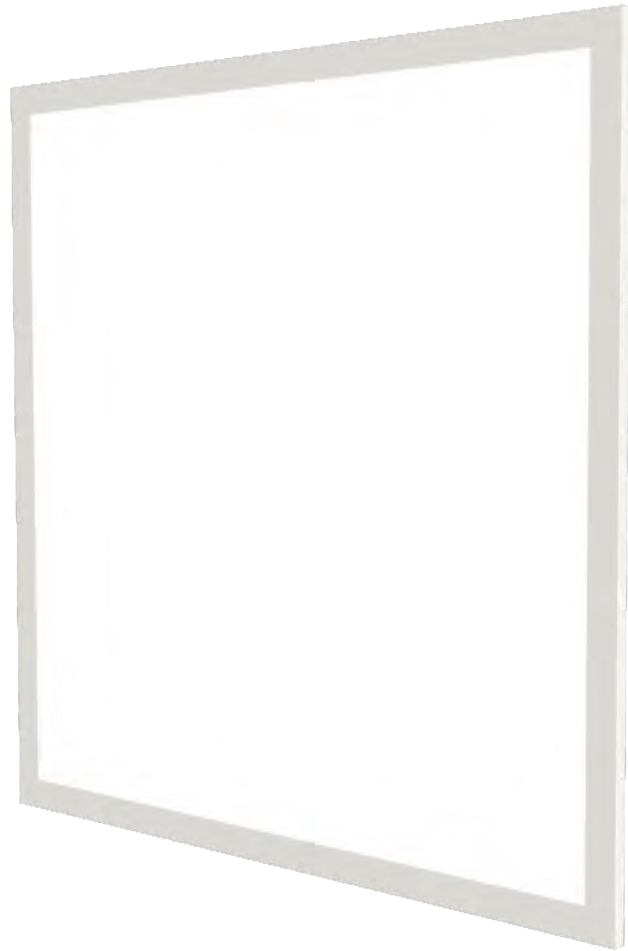

SLIM PANEL
TYPE

A⁺

18
W

25000
hrs

120°

RECESSED PANEL

Model	Power	Voltage	Life time	CRI	Beam Angel	The Size
SML6060-36W	36W	AC 85-265V	25000h	>80	120°	595*595*10mm
SML6060-42W	42W	AC 85-265V	25000h	>80	120°	595*595*10mm
SML6060-48W	48W	AC 85-265V	25000h	>80	120°	595*595*10mm
SML6060-60W	60W	AC 85-265V	25000h	>80	120°	595*595*10mm

2
A.N.O.S
GARANTIA

NO
UV/IR

NOT
DIMMABLE

INSTANT FULL LIGHT
0.03sec

25.000h

50.000
ON OFF

CE

RoHS
2002/95/EC



Hg
0,0mg



LED FLOODLIGHT

SERIES



SOLAR
TYPE

A

30
W

IP66

Suitable for installation:

Balcony / home / garden / park / mail box / outdoor car park / camping ground / street

Application place:

The main application of LED street, main roads, secondary roads and branches, factories, schools, gardens, city square, Garden Road lighting.



Intelligent
light control



Remote
control



Time
setting

2
A.R.O.S.
GARANTIA

NO
UV/IR



NOT
DIMMABLE



INSTANT FULL LIGHT
0.03s



25.000h



50.000
ON OFF



CE



RoHS
2002/95/EC



RECYCLING



NO
MERCURY

Hg
0,0mg



CO₂